



Divimach standard



Divimach with grid

Divimach Automatic hydraulic divider

The hydraulic divider DIVIMACH is an automatic machine for dividing, only in one operation, dough up to 20 kg into 10 or 20 equal parts. The working flexibility of the machine is increased further more through the adoption of the following options: "grid" for small sizes and "pressure regulation" to help the processing of low hydration mixtures .


Features

- Steel structure, mounted on wheels, ABS thermoformed outer casings and oven painted with epoxy powders.
- Stainless steel bowl unit and blades.
- Polyethylene monobloc dividers and inner surface of the lid
- Cover with ergonomic handle and assisted system in closing/opening.
- Flour recovery device to limit its dispersion in the environment.
- Hydraulic functioning, the pump is driven by a microprocessor device "stop & go" to optimize the working time, reducing stress and oil temperature.
- Oil tank capacity 18 lt.
- Centralized control panel that includes all the operational functions and controls.
- Max. bowl capacity 20 Kg.

- Dough pieces range from 160 gr. up to 2000 gr. expandable with the adoption of further more dividing grids (option).
- The DIVIMACH is manufactured in the standard version and the version prepared for the installation of the grid, both configurations may be accompanied by the device for the adjusting pressing intensity in order to facilitate the processing of low hydration mixtures.
- Electrical power supply: V 400/3/50 Hz (different voltages on request).


Accessories

- More dividing grids for various sizes, only on prepared models, see drawings on next page.
- Rectangular plastic dough trays to prepare the loading of the dough into the bowl.
- Plastic dough trays trolley.


Machinery complies with regulations 

MODELS	Ref.	Description
DIVIMACH A	E0H000202	Divimach standard version
DIVIMACH AG	E0H000212	Divimach with grid adapter
DIVIMACH AP	E0H000222	Divimach with dual pressure device
DIVIMACH AGP	E0H000232	Divimach with grid adapter and dual pressure device


PRE-CUT 20 DIVISIONS
+
GRID COD. 3H001103
= 40 DIVISIONS




PRE-CUT 20 DIVISIONS
+
GRID COD. 3H001104
= 80 DIVISIONS





PRE-CUT 20 DIVISIONS
+
GRID COD. 3H001105
= 40 DIVISIONS




WITHOUT PRE-CUT
(ONLY PRESSING)
+
GRID COD. 3H001106
= 6 DIVISIONS





WITHOUT PRE-CUT
(ONLY PRESSING)
+
GRID COD. 3H001107
= 6 DIVISIONS





WITHOUT PRE-CUT
(ONLY PRESSING)
+
GRID COD. 3H001108
= 16 DIVISIONS



WITHOUT PRE-CUT
(ONLY PRESSING)
+
GRID COD. 3H001109
= 8 DIVISIONS



PRE-CUT 10 DIVISIONS
OR
PRE-CUT 20 DIVISIONS
+
GRID COD. 3H001110
= 20 DIVISIONS
OR
= 40 DIVISIONS




SPEZZATRICE AUTOMATICA DIVIMACH

NOR08H002

AUTOMATIC DIVIDER DIVMACH

14/10/08

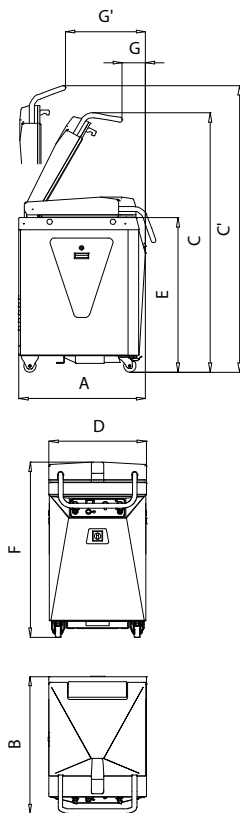

DATI TECNICI - TECHNICAL FEATURES

A		mm	820							
B		mm	890							
C - C'		mm	1680 - 1860							
D		mm	630							
E		mm	1000							
F		mm	1140							
G - G'		mm	150 - 520							
n° PEZZI - no OF PIECES	10	20	/	/	/	/	/	/		
n° PEZZI CON GRIGLIA - no. OF PIECES WITH GRID	/	/	20	40	40	5	40	80	10	
DIMENSIONI TEORICHE PEZZO-PIECE RATING DIMENSIONS	mm	100x200	100x100	50x200	50x100	50x100	100x420	25x200	50x50	100x200
CAPACITA' - CAPACITY							min. kg	4		
							max. kg	20		
PRODUZIONE ORARIA - HOURLY OUTPUT							min	900		
							max	1500		
POTENZA INSTALLATA - INSTALLED POWER							kW	1.8		
POTENZA MAX ASSORBITA - MAX ABSORBED POWER							kW	1.8		
CONNESSIONE EL ETTRICA - PLUG COUPLING								3PH+Gr		
PESO - WEIGHT							kg	380		
VOLUME IMBALLO - PACKING VOLUME							m ³	1		



ESMACH SpA — 36040 Grisignano (VI) Italy Via V. Veneto, 143
tel. 0444 419777 fax 0444 419708 export fax +39 0444 419709
e-mail: commerciale@esmach.it - export e-mail: export@esmach.it
www.esmach.it