

backmax Accessories
hot air baker's oven with clean lines for baking oven fresh rolls

backmax easy to clean
easy maintenance
hot air baker's oven with clean lines for baking oven fresh rolls



Mobile framework FU 10.64




Shelves ET 3.64

Shelves ET 3.64	
Dimensions (W/D/H) in mm	790 x 755 x 300
Trays	3

Mobile framework FU 10.64	
Dimensions (W/D/H) in mm	790 x 755 x 1000
Trays	10
Preparation drawer	no

Mobile framework FUL 7.64	
Dimensions (W/D/H) in mm	790 x 755 x 1000
Trays	7
Preparation drawer	Yes, on request with additional ingredient drawer for 6 inserts

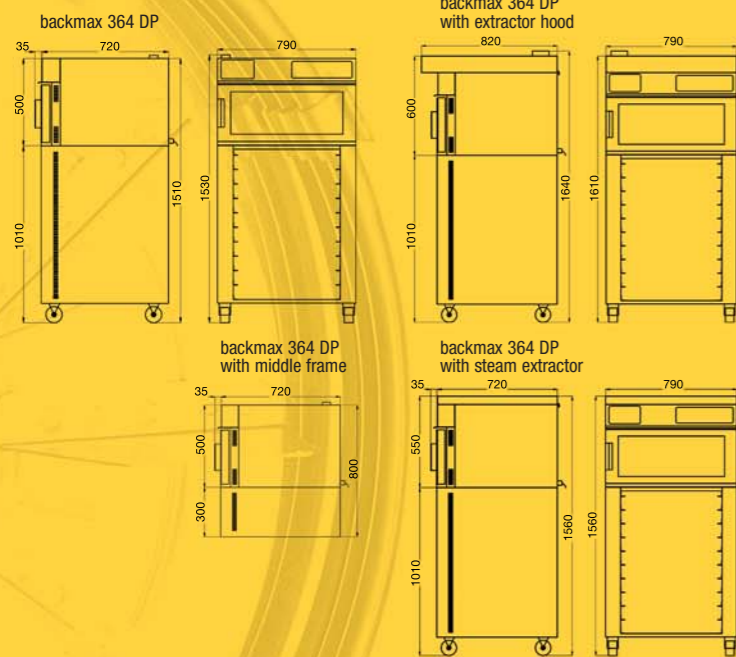

Mobile framework FUL 7.64



The Hot Air Baker's Oven with Professional Look For Viewable Baking of Oven-Fresh Rolls



Ingredient drawer with 6 containers



Easy to change halogen lighting

backmax (364 M)

- Stackable baker's oven with manual controls
- Simple, clear operation
- 2 ventilation fans for even baking results
- autom. right-left rotation of the ventilation fans
- interior oven lighting in the door
- Thermostat and 2 timers for baking time and steaming
- Autom. door opener
- Integrated 4 litre water tank
- Alarm for lack of water
- Easy to clean double-glazing with flap opening
- Hygienic baking oven
- Steam extraction
- Easy maintenance
- On request with mains tap connection

Special colours on request, technical changes reserved



backmax (364 DP)

- stackable baker's oven micro-processor controlled
- simple operation due to multi-functional dial knob,
- display and self-regulating menu
- automatic door opener
- integrated 4 litre water tank, alarm for lack of water
- easy to clean double glazing with flap opening
- rounded, hygienic oven interior
- baking trays easy to remove
- steam extractor hood, bake longer function, serial interface
- stackable, on request with mains tap connection
- 30 baking programmes, each with 5 phases
For each phase baking time, temperature, fan revs steam and stop fan can be set



Details	Exterior dimensions (W/D/H) in mm	Connected load	3 Trays	Weight
	790 / 755 / 500	400V/3N 50 Hz; 5,3kW	600 x 400 mm	75 kg

*The special colours refer to the front glass

Details	Exterior dimensions (W/D/H) in mm	Connected load	3 Trays	Weight
	790 / 755 / 500	400V/3N 50 Hz; 5,3kW	600 x 400 mm	75 kg

*The special colours refer to the front glass



Integrated water tank in a drawer



Hygienic oven interior